

Article # A2-02-02



FEATURES

LEATHER: Genuine Leather, Cool Vent Technology.

SOLE: Slip Resistant, PU/PU Double Density Sole, Antistatic, Shock Absorber, 200 Joules Broad Steel Toe & Flexible Steel Plate.

INSOLE: Orange Color, Anti-Fungal, Anti-Bacterial and Anti-Odor.

MESH LINNING: Orange.

COLOR: Black

SIZES: 38 - 46, 6 Months warranty against manufacturing defects. Warranty voids, if used in water & cement.

APPLICATION

Construction, Maintenance, Logistics & Warehouse.

Metal Industry.

Light Engineering Industry.

COLOUR, SIZE & ERP CODES



ERP Code
A2-02-02-01-01

Size Available
38 to 46

Colour


BLACK




STANDARDS

CE EN 20345, S1P

ANATOMY OF A SAFETY SHOE

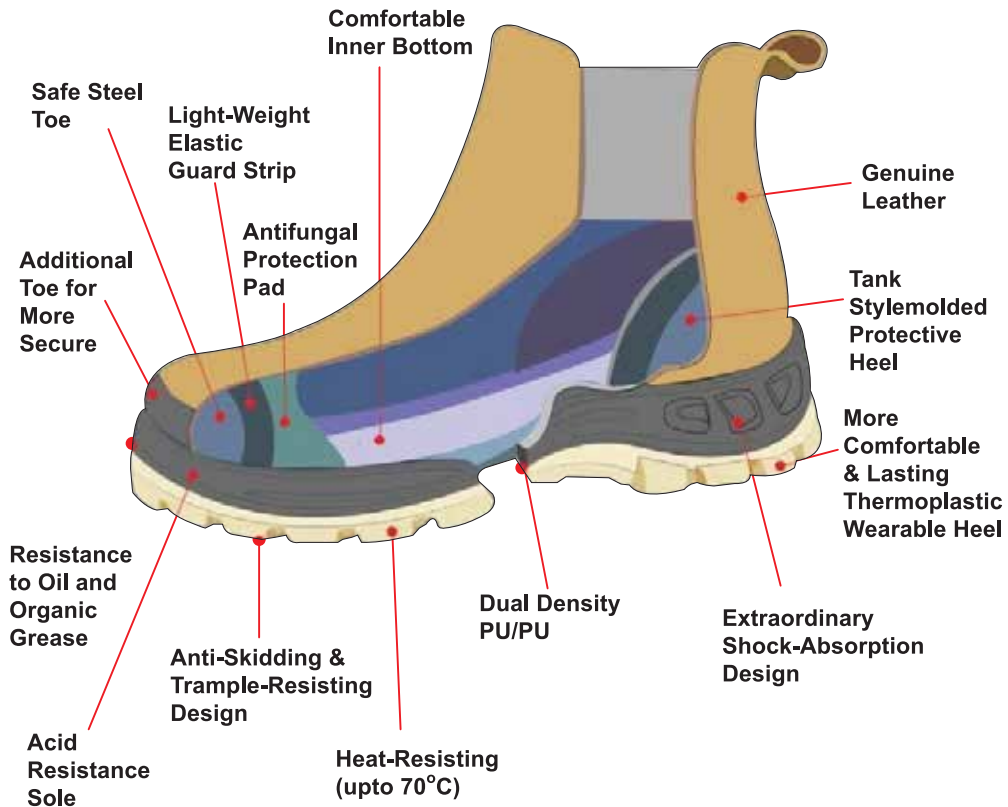

Nature of Complaints Guaranteed for Re-placement

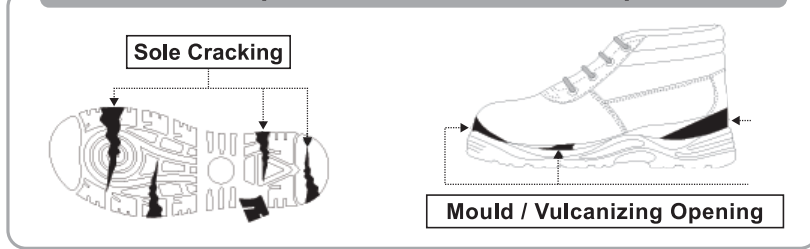

HIGH QUALITY MATERIAL UPPER	OIL RESISTANT
STEEL TOE CAP 200 JOULES	ACID & ALKALI RESISTANT
EXTREME GRIP SOLE	HEAT RESISTANT UP TO 70°C
PUNCTURE RESISTANT UPON REQUEST	QUALITY CONTROLLED
ANTI-STATIC	6-MONTH WARRANTY ON SOLE


- AMERIZA TOE CAP TECHNOLOGY**
- Manufactured with high steel toe is certified to with stand a drop test impact of 200 Joules.
 - Scientifically shaped for comfort and protection.
 - Toe cap with Latex liner to eliminate toe cap pressure on the toes.
- AMERIZA SOLE TECHNOLOGY**
- Dual Density PU/PU Outsole. Flexible and Strong.
 - Dual density cleats have a core of softer, low density polyurethane which acts as a shock absorber.
 - Provides a combination of greater comfort less leg and back fatigue and more stability than other footwear.
 - Designed to absorb shocks on uneven, rough surfaces.
- AMERIZA SOCKS TECHNOLOGY**
- Provides an inner breathable lining which aides sweat absorption.
 - Full arch support and heel cushion for maximum comfort.
- AMERIZA HIGH QUALITY GENUINE LEATHER**
- Special care taken in selecting high quality genuine leather 1.3~1.8mm or 1.8~2mm Buffalo.
 - Genuine Leather is absorbent and breathable, making it comfortable to wear all day.
 - Hardwearing and longer lasting.

GENUINE LEATHER UPPER	SOLE-NON-SLIP PETROL OIL & HEAT RESISTANT
STEEL TOE CAP IMPACT PERFORMANCE BS 1870-200 JOULES	STEEL MID PLATE PENETRATION RESISTANCE 1100N(OPTIONAL)

SIZE CONVERSION TABLE

US	UK	EU	MM
6.5	6	39	245
7	6.5	40	250
8	7.5	41	260
8.5	8	42	265
9.5	9	43	275
10	9.5	44	280
11	10.5	45	290
12	11	46	300

PACKAGING

UNIT	STANDARD	PACKING PER PKT	PACKING PER CTN	ORIGIN	NET WEIGHT / CARTON (KG.)	GROSS WEIGHT / CARTON (KG.)	CARTON DIMENSION (CMS.) L x W x H	CBM PER CTN
Pair	 S1P EN20345	1 Pair	10 Pairs	CHINA	_____	38 - 13.00 39 - 13.00 40 - 13.30 41 - 13.38 42 - 13.45 43 - 14.30 44 - 15.00 45 - 15.90 46 - 16.00	62.00 X 39.00 X 32.50 62.00 X 39.00 X 32.50 62.00 X 39.00 X 32.50 62.00 X 41.00 X 33.00 62.00 X 41.00 X 33.50 62.00 X 41.00 X 33.50 64.50 X 42.50 X 36.00 64.00 X 43.50 X 35.50 63.50 X 43.50 X 33.50	0.099